

PRECISION. POWER. PERFORMANCE.



REXNORD



Heads Above The Rest

Rexnord represents the most comprehensive portfolio of power transmission and conveying components in the world with brands like Falk™, Rexnord® and Link-Belt® .

Rexnord is a trusted name when it comes to providing skillfully engineered products that improve productivity and efficiency for industrial applications worldwide. We are committed to exceeding customer expectations in every area of our business.

Because of our customer focus, we strive to thoroughly understand the needs of your business and have the resources available to work closely with you to reduce maintenance costs, eliminate redundant inventories and prevent equipment down time.

The rules continue to change in today's increasingly competitive global marketplace. As the marketplace changes, we strive to provide the best overall customer experience through our innovative products and services, exceptional people, and speed in everything we do.

Take a closer look at what separates Rexnord from the rest.

Delivering On Schedule – Worldwide

We have dedicated production facilities in the U.S., Canada, Mexico, Brazil, China, France, Australia, Germany and Italy. Our Great Britain and Belgium offices provide global availability of quality Rexnord products and services to meet your schedule – not ours.

Flow manufacturing technology offers more cost-effective production and reduced lead times. Our distributor locations and Rexnord account executives provide local availability.

- Metric and imperial products are stocked and shipped worldwide to help minimize downtime
- Modular components allow most products to be assembled for specific requirements from Rexnord facilities and distributor locations around the world
- Online purchasing is available to customers to streamline purchasing and minimize transaction costs

Unmatched Responsiveness

Rexnord support helps balance capital investment against spares inventories, operating costs and maintenance costs to keep you producing.

Speed Parts online, spare parts information and pricing helps you more efficiently manage spares inventories and maintenance programs. Our online service data includes information on lube intervals, tightening torques, and alignment procedures.

- Field service from factory-trained experts is available worldwide
- Training schools present the latest field-practical gear drive and coupling service techniques
- Renew and Prager restore like new or upgraded performance for significantly less than the price of new equipment



Proven Products, Superior Performance, the Right People – From a Single Source

One feature of the industrial landscape never changes: Reliance on essential products that give it strength and staying power. Now, more than ever, the need for a profitable solution – from one single flexible and reliable partner – is critical.

No other company can offer such a diverse and extensive selection of components essential to keeping industry on the move. And no other company stands ready to back these products with the same measure of application and service support. For more than 100 years, we at Rexnord have been a primary source of power transmission and conveying products for industries around the globe.

For more than 100 years, we at Rexnord have been a primary source of power transmission and conveying products for industries around the globe.

Gear Drives - Rugged Design, Reliable Construction



High-quality, reliable and rugged gear designs are installed in the world's most challenging applications. More than 100 years of experience, a full product line, technical support, and local service allow for maximum performance and the lowest total cost.

Parallel & Right Angle Solutions

Falk™ Drive One® Universal Drives

Ratios: 1.25:1 to 140:1
Power: 20 to 1,900 kW
(25 to 2,500 hp)
Torque: 5 to 94 kNm
(58,000 to 840,000 lb-in)

- 9 sizes
- Right Angle or parallel shaft
- Horizontal or vertical output
- Solid or hollow output shafts
- Base or shaft mounted
- Exclusive 6-sided mounting for unmatched versatility
- Many pre-engineered accessories to provide complete application solutions
- Lowest lifetime cost
- Quick Ship Program - Many sizes/types/ ratios available for premium delivery 5 days or less



Falk™ Drive One® Conveyor Drives

Ratios: 5.6:1 - 71:1
Power: 121 to 6,626 kW
(157 to 8,700 hp)
Torque: 112 to 245 kNm
(991,000 to
2,169,000 lb-in)

- 4 sizes
- Horizontal output
- Solid output shafts
- Base or shaft mounted
- 60,000 hour L10 life at 1.5 service factor
- Robust universal left/right split design
- Cool running through integrated oil distribution system and low sump levels



Falk™ Drive One® High Torque Drives

Ratios: 160:1 - 700:1 (higher ratios available)
Power: to 1000 hp
Torque: 103 to 458 kNm
(910,000 to 4,050,000 lb-in)

- 6 sizes
- Horizontal output
- Solid or hollow output shafts
- Base or shaft mounted
- High torque from a compact package
- Cost-effective alternative to hydraulic and conventional drives
- Quick delivery from stock components



Falk™ Drive One® High Thermal Drives

Ratios: 1.25:1 - 25:1
Power: 37 to 1,900 kW
(50 to 2,500 hp)
Torque: 1.3 to 23 kNm
(12,000 to 200,000 lb-in)

- 8 sizes
- Horizontal output
- Solid output shafts
- Base mounted
- Low cost alternative to oversize drives or drives with complex or expensive cooling accessories
- Generous sump to augment heat dissipation
- Designed to satisfy tough thermal specifications



Falk™ Drive One® Alignment-Free™

Higher Ratios available
Power: 22 kW to 630 kW
(30 to 800 hp)
Torque: 5.6 to 130 kNm
(30,000 to 1,150,000 lb-in)

- 11 sizes
- Horizontal output
- Solid and hollow outputs
- Right angle shaft mounting
- Soft start conveyor drive solution
- Universal left/right design, no foundation or shaft alignment required
- NEMA:
 - C-Face
 - D-Face
- IEC
 - B Flange



Falk™ A+ Plus Parallel/Right- Angle Drives

Ratios: 1.80:1 - 437:1
Power: to 14,168 kW
(to 19,000 hp)
Torque: 2.9 to 621 kNm
(26,000 to 5,500,000 lb-in)

- 17 sizes
- Horizontal or vertical output
- Solid or hollow output shafts
- Base or shaft mounted
- Fabricated steel housing
- Magnum no-leak seals
- An effective solution for nearly every application



Gear Drives - Rugged Design, Reliable Construction



Concentric Solutions

Rexnord® Planetgear™ 7000 Speed Reducer

Ratios: 9:30:1 to 7052:1
Power: 750 kW (1,000 hp)
Torque: to 102 kNm (905,000 lb-in.)

- 14 sizes
- Handles high-shock loads, 250% overload capacity
- Modular design leads to ease of assembly
- Locally available
- Optional scoop, flange, or baseplate mounted motors
- Compact Power Dense package is lighter weight and smaller than traditional reducers
- Taconite Duty Seals provide optimal performance and long seal life
- Internal Backstop is easily field installed. Pawl design is compatible with extreme pressure and synthetic oil



Rexnord® Shaft Mounted Planetgear™ (SMP)

Ratios: 11 to 1785:1
Power: to 375 kW (500 hp)
Torque: 15-339 kNm (140,000 to 3,000,000 lb-in.)

- 5 sizes
- Concentric configurations
- Taconite duty seals
- Optional scoop, flange, or top-mounted motors
- Custom solutions available to meet exact application requirements. Modifications include torque arm, c-face input, and hollow output shaft bore sizes
- Alternative to Traditional Shaft Mounts. Available in 5-7/16" and 6-7/16" hollow bore
- Hydro Advantage, an innovative hydraulic removal system, is integral to the low speed shaft and applies a separating force between the end of the driven shaft and reducer.



Shaft-Mounted and Mixer Solutions

Falk™ UltraMax® Concentric Drives

Ratios: 1.5:1 to 195:1
Power: to 375 kW (500 hp)
Torque: to 60,000 Nm (530,000 lb-in)

- 12 sizes
- Concentric configurations
- Optional scoop, flange, or baseplate mounted motors
- Helical gearing minimizes noise and vibration
- Available in low ratio for high speed applications
- Heavy-duty bearing and seal protection



Falk™ Quadrive® Shaft-Mounted Drives

Ratios: 5, 14, 25:1
Power: to 224 kW (300 hp)
Torque: to 40,675 Nm
(360,000 lb-in)

- 11 sizes for flange or shaft mounting
- Horizontal or vertical mounting
- Bushing bores from 25 to 160 mm (1 inch to 6-1/2 inch)
- 5 to 350 rpm output speeds
- Torque Assist TA Taper® bushing guarantees removal



Falk™ Ram® Mixer Drives

Ratios: 5.06:1 to 1,207:1
Power: to 4 100 kW (5,500 hp)
Torque: to 429,000 Nm (3,800,000 lb-in)

- 18 sizes in parallel shaft or right-angle shaft configurations
- Solid and hollow shafts
- Top, bottom, or side entry mixer mountings
- Rugged, rigid housing that includes:
 - No leak drywells
 - Extended bearing life
 - Large diameter shafting



Gear Drives - Rugged Design, Reliable Construction



Falk™ Ultramite® Gearmotors

UC Helical Concentric

Ratios: 1.4:1 up to 16,000:1
Power: 19 kW to 37 kW (1/4 hp to 50 hp) capacity
Torque: to 5 kNm (40,000 lb-in)

- 10 sizes
- C-face and solid inputs, inch or metric
- Base and optional flange mounted designs
- Horizontal or vertical mountings



UB Right-Angle Helical Bevel

Ratios: 8:1 to 10,000:1
Power: 19 kW to 74 kW (1/4 hp to 100 hp) capacity
Torque: to 13 kNm (120,000 lb-in)

- 9 sizes
- C-face and solid inputs, inch or metric
- Straight bored hollow, tapered hollow shaft with TA bushings, or solid output shafts
- Base, shaft or flange mounted designs
- Horizontal or vertical mounting



UJ Shaft-Mounted Offset Helical

Ratios: 5:1 to 20,000:1
Power: 19 kW to 30 kW (1/4 hp to 50 hp) capacity
Torque: to 5 kNm (48,000 lb-in)

- 6 sizes
- C-face inputs provide convenient, beltless packages
- Base, shaft, or flange mounted designs
- Shaft-mounted designs utilize Falk™'s unique TA Taper® bushing
- CEMA screw conveyor design
- Horizontal or vertical mounting



UW Right-Angle Helical Worm

Ratios: 8:1 through 60,000:1
Power: 19 kW to 37 kW (1/4 hp to 50 hp) capacity
Torque: to 5 kNm (46,000 lb-in)

- 8 sizes
- C-face and solid inputs, inch or metric
- Base, shaft or flange mounted designs
- Straight bored hollow, tapered hollow shaft with TA bushings, or solid output shafts
- Horizontal or vertical mounting



Worm Gear and Accessories

Falk™ Omnibox® Worm Gear Drives

Ratios: 5:1 to 3,600:1
Power: to 81 kW (100 hp)
Torque: to 10 168 Nm (90,000 lb-in)

- 14 sizes for foot, flange, or shaft mounting
- 34 mm thru 254 mm (1.33 inch thru 10 inch) centers
- Vertical or horizontal inputs and outputs



Falk™ True Hold® Low Speed Backstops

- 16 sizes
- Bores: 38 to 510 mm (1.5 in to 20.0 in)
- Torque: 4 068 Nm to 1 012 847 Nm (3,000 to 747,000 lb-ft)
- Overrunning speeds from 1 to 2,800 rpm



Falk™ GMax® 6000- Gear Drive Lubricants

Horsepower, Heat, Moisture, and abrasive contamination are constantly working to break down your gear drive lubricant. With Falk™ GMax 6000, you don't have to worry! At Falk™, we manufacture the highest quality gear drives in the world! GMax 6000 is designed to provide superior wear protection in the most demanding gear drive applications. The gearing in Falk™ drives leave the factory filled with GMax 6000 lubricants and are warranted for a period of ten years from the date of shipment against failure due to excessive wear or surface distress.

Falk™ GMax® 9000- Open Gearing Lubricant

Now we can offer the perfect lubricant to protect heavy-duty gearing - GMax 9000. GMax 9000 is specially formulated to provide the best wear prevention for open gearing and pinions in the industry. It provides this superior wear prevention because of superior viscosity stability and the low coefficient of friction we have designed into it.

Falk™ AirMax® Breather

Unique Moisture & Particulate Protection for Enclosed Gear Drives

Reduce premature gear drive failure. During the "inhalation" cycle the AirMax media blocks moisture from entering. During the "exhalation" cycle the media allows moisture to exit.



Three- Year Warranty



Three-year warranties are offered on the following heavy-duty geared drive products:

- Falk™ Drive One®
- Falk™ A+Plus®
- Rexnord® Planetgear™
- Rexnord® Planetgear™ SMP
- Falk™ UltraMax®
- Falk™ Quadrive®
- Falk™ Ram Mixer®
- Falk™ True Hold®

Gear Drives - Rugged Design, Reliable Construction



Product Services

FALK RENEW

PRAGER

Service Parts

Genuine Falk™, Link-Belt®, and Rexnord® service parts are available for all models and generations of enclosed gear drives. Reverse-engineering of non-current, obsolete or competitive service parts are available from our Prager manufacturing and engineering group.

**Rexnord®
Link-Belt® FALK®**

Remanufactured Gear Drives

Falk™ Renew® can supply remanufactured gear drives for many Falk™, Link-Belt and Rexnord branded models. A remanufactured gear drive utilizes a reconditioned and recertified housing and all new revolving elements. Remanufactured gear drives carry a three-year, "New Unit" warranty.



Gear Drive Repair

Falk™ Renew® and Prager specialize in repairing Falk™, Link-Belt®, and Rexnord® gear drives, but can also perform quality repairs on all makes and models. We operate multiple regional repair locations in North America. Our standard repair warranty is 18 months from shipment of the repaired gear drive.



Field Service

Renew® and Prager field service groups provide a breadth of services. We can provide everything from installation assistance to complete in-place repair and rebuild.



Falk™ Mill & Custom Products

Gear Drive and Coupling Maintenance Training

This school is four days of intensive hands-on gear drive and coupling maintenance training for today's working maintenance mechanic. The class is designed to provide participants with a basic understanding of the fundamentals of gear drive disassembly and assembly, including lubrication issues and failure analysis of gears, bearings, shafts and seals. Sessions feature parallel and concentric shaft gears, complete with setting bearing floats, setting of mounting distance and backlash for spiral bevel gears.



Falk™ Mill Products

Critical power transfer systems can't afford to be down...period! That's why heavy industry around the world relies on Falk™ Mill Products to redefine total lifetime value. Products include gears, pinions, reverse engineering, steel castings, split kiln tires, and drives. Full service, state-of-the-art manufacturing facilities in the United States and Australia offer exceptional global availability of world-class quality power transmission solutions for heavy industry.



Custom Drives

Our design, development and manufacturing capabilities are not limited to producing our standard products. From computer-aided design to state-of-the-art quality control operations, few manufacturers are as well equipped as Rexnord. Providing practical solutions to difficult design problems is routine. Custom Drives that develop torque measured in millions of Newton-meters or inch-pounds is all in a day's work. Whatever the project size or special problems, if it involves custom engineering for power transmission, Rexnord offers a unique drive solution.



Bearings Are Right on Track



Rexnord customers have depended on our premium quality, design, performance and technical support for more than 75 years. Our well known brands include Rexnord®, Link-Belt® and MB® encompassing ball bearings, cylindrical roller bearings, sleeve bearings, and collar and adapter mounted spherical roller bearings. Primary applications include industrial machinery, conveyors, chain and belt drives, fans and blowers, and power transmission.



Rexnord® Roller Bearings

- Full range of housing styles
- Shaft sizes up to 178mm (7")
- Super-finished rollers and races
- Four shaft attachment styles
- 3 standard field interchangeable seals
- Auxiliary end caps
- Fully self aligning up to 3° total
- Field adjustable internal bearing clearance

Rexnord® 6000 Series SHURLOK™ Adapter Mount Roller Bearing

- Ease of install – 4x faster / Ease of removal
- Enables use of commercial grade shafting
- 3 degrees total of dynamic and static misalignment
- Superior sealing, speeds, & loads
- Break thru Spyglass™ Optical Strain Sensor (OSS)
- Ensures proper mounting tightness
- Proprietary Positive Locking System (PLS) longer life & ease of removal
- Fits entire Rexnord housing product line



Link-Belt® Roller Bearings

- Full range of housing styles
- Shaft sizes up to 127mm (5")
- Three shaft attachment styles
- 3 standard seals
- Fully self aligning up to $\pm 2^\circ$
- Field adjustable internal bearing clearance



Link-Belt® Adapter Mounted Spherical Roller Bearings

- Standard LER seal
- D5 Pentac auxiliary seal
- D8 taconite duty auxiliary seal
- Adapter press fit and mounting
- Industry leading bearing/housing fit (H7)
- Industry standard SAF interchangeable
- Grade 5 cap bolts
- Consistent mounting through precision drilled dowel holes
- Extra support for shock loads via center support bar in base
- Pry slots in cap for easy removal



Link-Belt® Cylindrical Roller Bearings

- Broad offering of standard narrow, wide and intermediate width series
- Special products designed for unique customer application requirements
- Shaft sizes up to 280mm (11")
- High capacity designs
- Full complement and retainer designs including formed steel, segmented steel and polymeric
- Manufactured to Industry Standards



Bearings Are Right on Track



MB® Ball Bearings

- Rugged, heavy-duty Krown Regal® housings
- Shaft sizes up to 75mm (2-15/16")
- Set screw and eccentric locking collars
- Extended or wide inner rings
- Alignable, precision, deep-groove ball bearings
- Super-finished bearing races



Link-Belt® Ball Bearings

- Full range of housing styles
- Shaft sizes up to 102mm (4")
- Centrik-Lok®, set screw and eccentric cam locking collars
- Extended or wide inner rings
- Light and heavy contact seals



Link-Belt® 300 Series Heavy Duty Ball Bearings

- Full range of housing styles
- Fixed & Expansion units
- Shaft sizes up to 102mm (4")
- Set screw, eccentric and adapter mount shaft attachments
- Extended or wide inner rings
- Alignable, precision, deep-groove ball bearings
- Super-finished bearing races



Link-Belt® Corrosion-Resistant Ball Bearings

- Full range of housings with anti-microbial protection
- Stainless steel bearing insert
- Shaft sizes up to 49mm (1-15/16")
- Front and rear double lip seals
- Protective safety caps



Link-Belt® Sleeve Bearings

- Available in rigid or Flex-Block
- Babbitt, bronze and cast iron bearing surfaces
- Finished machined housing ends for flush mounting of sprockets and sheaves
- 1-piece solid housing
- 2-piece split housing include: split, gibbed joint, and angular joint
- 2-piece bearings have shims to accommodate for adjustments and compensate for wear




Rexnord® Duralon® Bearings

- Electrically insulating and chemically resistant
- Corrosion resistant
- Lightweight – 77% lighter than steel and 30% less than aluminum
- Operate self-lubricated to 30,000 psi dynamically
- Minimize galling and scoring
- Resist galvanic and fretting corrosion
- Minimize slip stick problems
- Available in round, square, hex and custom shapes
- Eliminate contaminating lubricants and complex lubrication systems
- Extra long life in the presence of water or other liquid contaminant



The Complete Connection for all your coupling needs

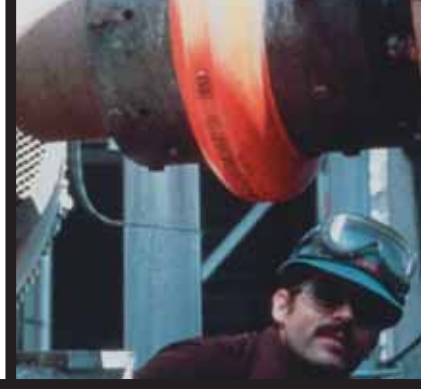

In the past 80 years of coupling manufacturing, Rexnord has seen and solved virtually every problem a coupling application can present. Today's buyer receives the benefits of that experience in a broad line of couplings, from Rexnord Omega[®], Thomas[®], and Addax[®] couplings to Falk[™] Wrapflex[®], Steelflex[®], and Lifelign[®] couplings – all manufactured for quality, reliability and easy maintenance.



Rexnord[®] Thomas[®] Disc Couplings

- No lubrication required
- Visual inspection
- No backlash
- Low restoring forces
- Wide temperature range
- High reliability
- Broad range of styles and sizes
- Custom design capability



Falk[™] Steelflex[®] Grid Couplings

- 25 sizes, 11 types
- Torsionally flexible
- Spring-steel grid flexing element
- Bores to 508 mm (20 inch)
- Capacities to 932,000 Nm (8,250,000 lb-in)
- Low initial and long-term cost



Rexnord® Omega® Elastomer Couplings

- No lubrication required
- Easy replacement without moving the hubs or connected equipment
- Excellent chemical resistance
- Protects equipment by cushioning shock loads and torsional vibration
- Accommodates unavoidable misalignment with low reactionary forces
- No need for coupling disassembly to inspect
- Standard and spacer coupling hubs are identical
- One spacer coupling size can accommodate different shaft separations



Rexnord® Viva® Elastomer Couplings

- No lubrication required
- Easy replacement without moving the hubs or connected equipment
- Excellent chemical resistance
- Protects equipment by cushioning shock loads and torsional vibration
- Accommodates unavoidable misalignment with low reactionary forces
- No need for coupling disassembly to inspect
- Standard spacer coupling hubs are identical allowing reduced inventories
- One spacer coupling size can accommodate different shaft separations
- Higher torque & bore capacity
- Provides a uniform failure area for overload protection if required



Falk™ Wrapflex® Elastomer Couplings

- No lubrication required
- 9 sizes, 3 types
- Polyurethane element has excellent wear and chemical resistance
- Bores to 186 mm (7.25 inch)
- Capacities to 15,028 Nm (133,000 lb-in)
- Simple to install and non-lubricated
- Standard nylon cover (sizes 5R-50R) with positive location and retention
- Optional epoxy coated cover for Sizes 5R-50R (standard on sizes 60R-80R)



The Complete Connection for all your coupling needs



Rexnord® Addax® Composite Couplings

- No lubrication required
- High misalignment tolerance
- No fretting corrosion
- Extended single spans without intermediate bearings
- Low weight
- Corrosion resistance



Falk™ Lifelign® Gear Couplings

- Flange sleeve and continuous sleeve
- 28 sizes, 20 types
- Torsionally rigid
- Precision-crowned, gear-to-gear flexing element
- Bores to 1,200 mm (50 inch)
- Capacities to 8,191,813 Nm (72,500,000 lb-in)
- Lowest initial cost for high capacities



Falk™ True Torque® Fixed-Fill Fluid Couplings

- 11 sizes, 5 types
- Gear, disc, elastomer, and grid coupling; hollow shaft and sheave connections
- Delay, extended-delay, and non-delay fill
- Power ratings to 1,119 kW (1,500 hp)
- Starting power adjustable from 40% to 250% of full-load torque
- Overload protection



Falk™ Orange Peel® Rotating Shaft Guards

- 6 types
- Polyethylene, steel, and aluminum
- Shaft, Spacer, and Fluid Couplings, and Line Shafts
- Diameters to 838 mm (33")
- Lengths to 2,438 mm (96")



Long Term Grease

Our Long Term Grease (LTG) is specially formulated to provide superior lubrication for flexible shaft couplings.

Benefits for your Application

- Increased coupling life
- Significantly extended relubrication intervals
- Reduced maintenance costs
- Reduced downtime
- Superior lubrication
- High load carrying capacities
- Usable up to 250°F (121°C)

Falk™ LTG grease is compatible with most coupling lubricants. For optimum performance it is recommended that couplings be cleaned of old grease before packing with LTG.

FIVE YEAR
5 FIVE
HEAVY DUTY WARRANTY

A new Falk™ Steelflex® coupling initially lubricated with the proper amount of LTG as described in the service manual, operated within the specified ambient temperature range and installed and aligned within the limits specified in the installation manual is warranted for five (5) years against lubrication-related grid member failure.

Rexnord® FlatTop® Chains and Components Deliver Productivity Solutions



Rexnord® FlatTop® conveyor chains, belts and components are leading edge conveying solutions designed to continuously improve productivity for customers in every application. Throughout the years, Rexnord's dedication to new product development has produced technological advances in product design of conveyor chains and components. Comprised of three strong brands – Rexnord®, MCC® and Marbett® - Rexnord conveying chains and components are manufactured to perform better and last longer. Every chain, belt and component stamped with a Rexnord brand has undergone extensive research and quality testing, ensuring our customer's conveying needs will be met with the most economical, efficient and reliable means possible. With over 120 years of experience, Rexnord is the industry's source for the most knowledgeable team of conveying experts, offering the broadest selection of high quality chains, belts, sprockets and accessories available in the world.

Productivity that Matters

Since plant efficiency and cost performance matter to you, we work to continuously improve our customers' productivity through superior material handling solutions

Global Leader, Global Partner

With more than 120 years of industry leadership and over 35 production plants and 5,000 people around the world, we serve you locally with quality Rexnord products and services to meet your business needs – and schedule

Always leading in technology and design

Continuously dedicated to new product innovation, we have led the industry with advances in the design and performance of conveying solutions – based on your application needs. The result is a product portfolio unmatched in scope and breadth.

World class customer experience

Expert application engineers who help you solve issues, dedicated customer service people that help your business run smoothly, tools to make your daily work easier and unwavering customer focus – some of the ways we commit to providing you a world class customer experience.




Rexnord® TableTop® Chains

Rexnord® TableTop® chains are engineered to satisfy a wide range of conveyor applications. A large selection of straight running and side-flexing chains are designed to convey flawlessly in even the most demanding environments. Chains formed from metal or molded from thermoplastic are perfect for high strength and high speed applications. Narrow widths are ideal for multiple strand and variable speed conveyors. Chains with low backline pressure rollers minimize product damage. Several chain series couple traditional top plates with roller base chain for increased strength and precision.



Rexnord® MatTop® Chains

Rexnord® MatTop® Chains provide a continuous conveying surface for applications demanding greater width requirements (available in both assembled-to-width and molded-to-width configurations). Pins extend the full width of the chain ensuring maximum strength and providing smoother conveying surfaces. Smaller pitch chains minimize the size of dead plates when transferring products over head or tail shafts reducing chordal action which helps eliminate container tipping and jam-ups at transfer points. Rexnord MatTop chains are engineered to satisfy a wide range of conveyor applications for virtually any product size.

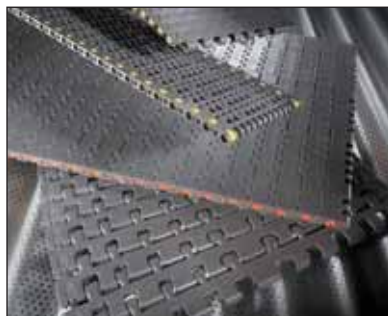

Rexnord® Marbett® Components

Marbett® conveying components offer complete solution sets for chain guide components, product handling components, frame support components, supporting and leveling elements, self-aligning bearings and specialty components such as nose-over bars and rollers. Engineered to perform in high-speed and high-sanitation applications, Marbett® components help extend chain life and provide smooth running conveying conditions. The combination of Marbett® conveyor components with Rexnord® and MCC® chains and belts provides a comprehensive range of conveying solutions that improve productivity in every application.



Heavy Duty Engineered Steel Chain and Roller Chain for the Most Demanding Applications



Rexnord is the acknowledged industry leader and most experienced chain manufacturer in the world. Our chain designs are created on the latest computer-aided design equipment, and then transmitted via computer network to the manufacturing floor where the designs are turned into finished products, using state-of-the-art manufacturing technologies.



Engineered Chain

Engineered Steel Chain

- Ideal for bucket elevators, drives and rugged conveyor service
- Available in pitch sizes from 41.783 to 177.8mm (1.645" to 7")

Welded Steel Chain

- Economical conveyor products
- Available in pitch sizes from 58.5978 to 228.6mm (2.307" to 9")

Polymeric Chains

- Light to medium duty conveyor and drive applications
- Ideal for areas where corrosion resistance, weight reduction and friction are important
- Available in pitch sizes from 41.402 to 88.9mm (1.63" to 3.5")

Accessories

- A wide variety of sprockets and elevator buckets are available

Cast Chain

- Ideal for slow to moderate speed conveyors and drives
- Available in pitch sizes from .22.86 to 153.67mm (9" to 6.05")

Drop Forged Chain

- Ideal for trolley, scraper and flight conveyors
- Available in pitch sizes from 76.2 to 228.6mm (3" to 9")

Double Flex Chain

- Made to flex around corners

Roller Chain

- Ideal for demanding applications from motorcycles and snowmobiles to glass plants and textile mills
- Available in pitch sizes from 9.525 to 101.6mm (3/8" to 4")
- Single and double pitch
- Multiple strand configurations
- Superior performance and long life
- Available in both Rexnord® and Link-Belt® brands

Our full line of Roller Chain includes:


- ANSI® Standard roller chain (single and multiple strand)
- Attachment chains
- Silent chains
- Oilfield chains
- Double pitch roller chain
- Heavy Series Chain
- Corrosion resistant & Heat resistant chain
- Self lubricating chain
- Hollow pin chain
- Leaf chain
- Specialty chain



Conveying Equipment – A Solid Investment



Rexnord has a wealth of experience, with satisfied customers for more than 6,000 installations in all 50 U.S. states and over 60 countries worldwide. Rexnord is the only systems supplier that manufactures all of the critical system components such as gear drives, bearings, chain, and couplings in-house.

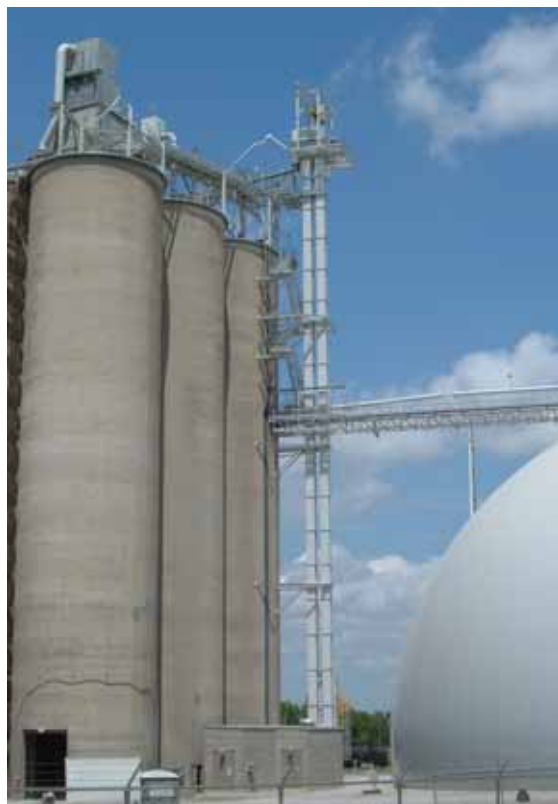

Bucket Elevators

Used to lift bulk materials continuously in a process, Rexnord® Bucket Elevators are designed specifically for critical applications. Handling tough materials such as those found in the Cement, Lime, Fertilizer, Chemical, Steel, Aluminum, Forest Products, and Power Generation Industries are our specialty. Rexnord® Bucket Elevators are available in chain, fabric, belt, or steel cable belt configurations. In addition, we offer a wide range of standard or custom configurations.



Conveying Equipment Delivers a Complete Package

Rexnord designs, manufactures and provides after-the-sale service on all critical components used in our equipment. This includes chain, traction wheels, sprockets, bearings, gear reducers and others, thus assuring single-source control and responsibility for manufacturing and service support throughout the life cycle of the equipment.


Apron Conveyors, Feeders, and Drag Conveyors

In addition to bucket elevators, Rexnord conveying equipment division designs, engineers, and fabricates complete apron type pan conveyors and feeders, flight conveyors and drag conveyors. Products shown are only a sample of the many conveyors Rexnord has supplied. As with our bucket elevators, all components are designed to match your material handling requirements from a single source manufacturer.



Idlers

Rexnord® idlers are available in belt widths from 457.2mm to 2.438M (18" to 96"), CEMA, and CEMA+ designs, with custom configurations. Super-sealed against water, dust, abrasives, and other contaminant Rexnord® idlers feature an easy, convenient patented one point greasing system. The greasing provides positive lubrication of all six bearings, which saves time and cuts maintenance costs. Factory sealed idlers are also available for excellent service if re-lubrication is not possible.

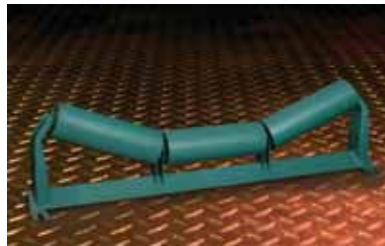

Accessories

A variety of options are available with all our equipment. These include tools for easy assembly or disassembly of bucket elevator and conveyor chains such as our Rexnord® Linkmaster®, Drivemaster® and Dragmaster® Chain Tools.

Standard head platforms, work platforms, walkways and ladders are available with our bucket elevators and conveyors, providing maintenance personnel with ease of access and work areas for inspection or maintenance of this equipment.

Retrofits

Capacity increases and equipment upgrades are often possible by retrofitting existing bulk material conveying equipment. Rexnord can evaluate your existing equipment to determine actual and maximum through put capacities. We can prepare recommendations on what can be done to achieve new desired capacities and solve performance problems.

Service Plus

Service Plus is also referred to as after-sale service. Quite simply, Rexnord is there when you need us. We'll provide chain wear life analysis, keep you informed of new products and existing product improvements, recommend maintenance schedules and routines, maintain replacement components, and provide people who can help, should problems ever develop.

Strategically located service centers and warehouses provide quality replacement parts and ensure that Rexnord and Link-Belt replacement components are available to customers.

Rexnord doesn't just supply the elevators; we work with our customers throughout the life cycle of the elevator.

Rexnord - a History of Aerospace Service

Rexnord aerospace products are used extensively on the world's most technically sophisticated aircraft from Stealth bombers and fighters to the newest commercial airplanes and even on the space shuttles. With more than 50 years of aerospace experience, Rexnord has been involved with virtually every major commercial and military airframe design effort during that time.



Cartiseal® Mechanical Seals - Since 1946 Cartiseal has been leading the way with aerospace sealing solutions. Cartiseal proves sealing solutions for turbine engines, APU, starters, gear boxes, and others.

Shafer® Bearings - Shafer has been a leader in aerospace roller bearing since 1938. Shafer roller bearings are particularly suited for flight control systems, landing gear and door systems.

Shafer® Tooling - Shafer has been providing specialized tooling for roller bearing since 1968. Shafer tools are a crucial part of proper bearing maintenance and installation.

PSI® Aerospace Bearing - Started in 1979, PSI has been leading the industry in slotted-entry bearings. These bearings are used in turbine engine mounts and as pivot points within landing gear, engine controls and thrust reversers.

Tuflite® Composite Bearings - Has been creating composite bearings since 1969. Tuflite composite bearings offer performance capabilities similar to their metal backer counterparts but with lighter weight and more predictable wear life.



Stearns® Brakes, Clutches and Electronic Components Focused on Performance

Since 1916, Stearns has been focused on meeting the needs of its customers setting the standard for brake and clutch quality, on-time performance, and commitment to innovative service. Internal Six Sigma and Demand Flow Manufacturing programs continue to support our goal of quality products with reduced cycle times. With a factory-trained sales force, a knowledgeable customer service group, world wide distribution and complete EDI capabilities, Stearns can respond to your needs.

Stearns Division – A Complete Product Portfolio

Primarily a North American design standard, Stearns is the market leader, offering the most comprehensive line of Solenoid Actuated Brakes (SAB's). SAB products can be found in a multitude of power transmission applications from naval vessels to vertical lifts where torque requirements range from 1.5 lb-ft to 1000 lb-ft.

The Armature Actuated Brake (AAB) is the design of choice in Europe and Asia. Stearns developed this brake to become a global supplier of industrial electro-mechanical brakes in products ranging from wheel chairs to portal cranes. AAB's are available to meet a wide range of braking requirements, offered in sizes ranging from 3 lb-in up to 300 lb-ft.

The SINPAC® solid state single phase motor switch is a robust alternative to the mechanical switch used traditionally in these motors. Motor manufacturers and OEM's throughout the world depend on SINPAC® switches for their high cycle applications.

Advanced Research Results in Cutting Edge Products

Ongoing research and testing are critical to the development of products that help our customers maintain a competitive advantage. And that's an advantage our customers have come to expect from Rexnord.

Rexnord Technical Service (RTS) Center is one of the most sophisticated on-site research facilities in the industry, with more than 30 years of experience as a mechanical and materials engineering services laboratory, with its roots in aerospace and industrial technology.



Here, our engineers and technicians employ the latest diagnostic and test equipment to explore promising new product designs, analyze component stress and fatigue factors, and pioneer new materials and manufacturing techniques. Our experienced, dedicated workforce takes pride in their skills and product, and assures that each finished product meets or exceeds exacting quality control standards.

We've responded to the needs of a changing market with innovative designs and new materials that enhance our customers' productivity. As a result, we can give you the convenience of more choices from a single source supplier. As well as more options and design flexibility in the specification of our products to individual applications.

Our commitment to delivering products of exceptional quality and unequalled application support is stronger than ever. And to serve you better, we're determined to maintain our position as the industry's most trusted and complete source of power transmission and conveying products worldwide.

*Rexnord's
value is
more than
just products.
It's a
reputation,
a commitment
to service,
a promise
of quality
along with
reliable
product
performance.*

World Class Customer Service

For more than 100 years, the dedicated people of Rexnord have delivered excellence in quality and service to our customers around the globe. Rexnord is a trusted name when it comes to providing skillfully engineered products that improve productivity and efficiency for industrial applications worldwide. We are committed to exceeding customer expectations in every area of our business: product design, application engineering, operations and customer service.

Because of our customer focus, we are able to more thoroughly understand the needs of your business and have the resources available to work closely with you to reduce maintenance costs, eliminate redundant inventories and prevent equipment down time.

Rexnord represents the most comprehensive portfolio of power transmission and conveying components in the world with the brands you know and trust.

Rexnord, Renew, Drive One, A+Plus, UltraMax, Quadrive, Ultramite, Omnibox, Ram, Gmax, True Hold, Krown Regal, Omega, Thomas, Addax, Orange Peel, Wrapflex, Steelflex, Lifelign, True Torque, Duralon, MB, Centri-Lok, TableTop and MatTop are registered trademarks of Rexnord Industries, LLC.

Falk, Alignment-Free, Planetgear, AirMax, Freedom, and Flex-Block are trademarks of Rexnord Industries, LLC.

Link-Belt is a registered trademark of the Link-Belt Construction Equipment Company.

ANSI is a registered trademark of the American National Standards Institute.

WORLDWIDE CUSTOMER SERVICE

AUSTRALIA

Rexnord Australia Pty. Ltd.
Picton, New South Wales
Phone: 61-2-4677-3811
Fax: 61-2-4677-3812

Falk-Rexnord Australia Pty Ltd
Broadmeadow NSW Australia
Phone: 61-2-4962-8000
Fax: 61-2-4962-8001

BRAZIL

Rexnord Correntes Ltda.
Sao Leopoldo - RS
Phone: 55-51-579-8022
Fax: 55-51-579-8029

CANADA

Rexnord Canada Ltd.
Scarborough, Ontario
Phone: 1-416-297-6868
Fax: 1-416-297-6873

CHINA

Rexnord China
Shanghai, China
Phone: 86-21-62701942
Fax: 86-21-62701943

EUROPE

Rexnord NV/SA
Mechelen, Belgium
Phone: 32-15-443811
Fax: 32-15-443860

Rexnord Kette GmbH
Betzdorf, Germany
Phone: 49-2741-2840
Fax: 49-2741-284-385

LATIN AMERICA

Rexnord International, Inc.
Milwaukee, Wisconsin
Phone: 1-414-643-2366
Fax: 1-414-643-3222
E-mail: international2@rexnord.com

MEXICO

Rexnord S A de C V
Mexico DF, Mexico
Phone: 52-55-9140-3500
Fax: 52-55-9140-3550

SINGAPORE

Rexnord International, Inc.
Singapore City, Singapore
Phone: 65-6338-5622
Fax: 65-6338-5422

UNITED STATES

Customer Service
Phone: 1-866-REXNORD
(1-866-739-6673)
E-mail:
[rexnord\(state\)@rexnord.com](mailto:rexnord(state)@rexnord.com)
Example:
rexnordohio@rexnord.com

ALL COUNTRIES NOT LISTED

Rexnord International
Milwaukee, Wisconsin
Phone: 1-414-643-2366
Fax: 1-414-643-3222
E-mail: international1@rexnord.com

